



Captura (Captura 100 LEGIC)

Operating instructions

Content

Page

General Description / Technical Specifications / Safety Precautions	2
Care and Maintenance / Factory Settings / Functional Description	3
Overview of Transponder Cards	4
System Components and Package Contents	5
Dimensions.....	6
Mounting on non-metal surfaces.....	7
Mounting on metal surfaces	9
Getting started and battery change / Tips for programming steps	10
Using the installation card / Programming the Master card	11
Programming the Master card / Closing and Opening	12
Unauthorised Transponders cards / Facility Manager Function / Emergency Opening	13
Deleting Individual Transponder Cards / Deleting All Transponder Cards	14
Changing Operating Mode	15
Deactivating and activating acoustic signals / Resetting to factory settings	16
Activation and deactivation of automatic locking.....	17
Activation and deactivation of unlimited shared use / Configure Captura with LEGIC system authorization media (SAM)	18
Remove LEGIC MTSC configuration on Captura	19
Battery warning / Reordering master cards / Firmware update / Disposal.....	20

GENERAL DESCRIPTION

The Captura 100 LEGIC lock is a battery-operated electronic furniture lock based on RFID technology, which is intended for use in living and office areas inside buildings. These operating instructions provide you with information on how to operate the locking system without errors. Keep the operating instructions in an easily accessible place. Improper use can destroy the locking system and lead to the loss of any warranty claims.

Please be sure to observe all warnings and read the operating instructions completely before proceeding with installation, commissioning and programming. It may be possible to use our locks and locking systems together with mechanisms made by other manufacturers, but their compatibility must be checked in each individual case. We cannot accept any liability for damage or loss due to incompatibility.

Wordings and graphics have been prepared with care. However, no liability will be assumed for any mistakes that may have occurred. Technical specifications as well as the scope of items in the system are subject to change without notice.

CAUTION: The lock can be configured with master and programming cards or with the LEHMANN Management Software LMS. These operating instructions describe how to use the locking system with master and programming cards. The software LMS and the corresponding documents can be found at <https://lms.lehmann-locks.com>.

TECHNICAL SPECIFICATIONS

Frequency	13,56 MHz National legislation about permissible radio frequencies must be observed.	
RFID technology	LEGIC prime, LEGIC advant, MIFARE® Classic, MIFARE® DESFire® EV1, EV2, HID iClass Support of smartphones with LEHMANN Transponder App only with master cards (no LMS) from firmware version 2.x. Locks with LEGIC master tokens do not support smartphones.	
Supported transponders	Compatible with the following RFID transponders: LEGIC: ATC256-MV410, ATC1024-MV010, CTC4096-MP410, ATC1024-MV110, ATC4096-MP311, ATC4096-MP312, CTC4096-MM410, MIM1024-MN	MIFARE® Classic, MIFARE® DESFire®, ISO 14443A Existing transponders must be checked for compatibility and reading distance! MIFARE® Classic and LEGIC prime transponders are only supported in „Assigned use“ mode. MIFARE® Classic and LEGIC prime transponders cannot be used with the LMS.
Energy supply	1 x CR123A	
Operating temperature	-5 °C to +60 °C	
Storage temperature	-25 °C to +70 °C	
Reading distance	Up to 30 mm with LEHMANN user cards. Other transponders may have a shorter reading distance and must be checked in advance. The material of the furniture can influence the reading distance. A test on the furniture regarding the reading distance is therefore recommended.	
Type designation	L3LA13CX	



SAFETY PRECAUTIONS

- Different types and brands as well as fresh and used batteries must not be mixed!
- When replacing the batteries, observe correct battery polarity and position! Do not reverse polarity!
- The batteries must not be charged!

- Do not heat or deform batteries, take them apart or short-circuit them!
- Never throw batteries into open fire!
- Keep the batteries away from children!
- Dispose of used batteries properly!
- Pack the battery for the transport of the lock so that no short circuit can occur (risk of explosion and fire).

CARE AND MAINTENANCE

- Do not spill any liquid over or into the individual components of the lock, and never immerse the components in any liquid.
- The product should not be exposed to direct sunlight.
- Clean the lock and the components with a clean, soft, damp cloth only.
- Do not use any cleaning agents containing abrasives or solvents, as these may damage the housing.
- Treating any of the electronic and mechanical components improperly or in any way other than described in these operating instructions may lead to malfunctions and the loss of warranty.
- Change the battery in good time. At the latest, when the lock issues corresponding battery warnings.

FACTORY SETTINGS

The lock can be closed and opened at this point of time with one or more installation cards. After a Master card has been programmed, the lock is in the operating mode “assigned use” and the installation card cannot be used any more.


FUNCTIONAL DESCRIPTION

With the Captura 100 LEGIC lock, you can conveniently lock and unlock your furniture. Non-contact RFID technology based on 13.56 MHz is used as the “key”. Two operating modes are available:

Operating mode	Description
Assigned use	There is a fixed assignment between the transponder cards and the locks. The user cards are programmed or deactivated at the lock by means of a master card. The system thus allows the granting of selective access authority for an item of furniture (e.g. cabinet), so that only authorised persons with a transponder card have access. A transponder card can be programmed simultaneously on multiple locks with “Assigned use” operating mode. Up to 250 different transponder cards can be programmed per lock.
Shared use	With the user card, a user can use a free lock / storage of his choice. It is not possible to program the user card using the master card. If a lock is closed with the user card, the user card and the lock are coupled to each other. The card cannot be used at any other lock in “shared use” mode, and the lock will not accept any other user card. This coupling is only deactivated when the user opens the lock again with his user card. The card can now be used for another lock.

In order to use the operating mode “shared use” with LEGIC advant transponders, the RFID system must be configured with LEGIC System Authorization Media (SAM), (see Configure Captura with LEGIC System Authorization Media (SAM), P. 18). LEGIC prime transponders are only supported in the mode “assigned use” without LEGIC stamp on the RFID system.

Please note that the distance between two or more locks with an inserted battery must be at least 15 cm (lateral distance) and 20 cm (frontal distance) during storage, transport and operation.

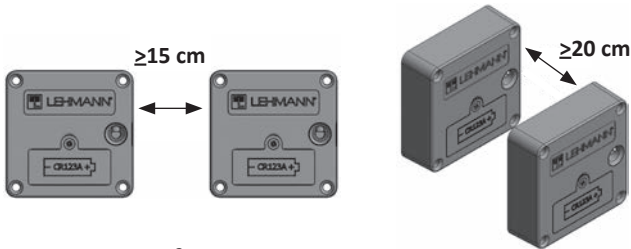

OVERVIEW OF TRANSPONDER CARDS

Card type	Description
Installation card (only for assembly and testing purposes)	The installation card can be used specially for assembly and testing purposes in order to perform basic functions on the lock (opening and closing). Furthermore, the lock can be closed using the installation card for transporting the furniture to its destination. This card is for universal use. Any number of installation cards can be used at any lock. Prior programming of a master card is not necessary. After a master card has been programmed for the first time, the lock is disabled for the installation card. The use of an installation card is optional.
Master card	For complete commissioning, a master card must be programmed for both operating modes. The master card is required for starting and terminating programming operations. This also includes the programming of user cards in "Assigned use" mode. The master card also enables the so-called Facility Manager function and the emergency opening of the lock. A maximum of one master card can be programmed per lock. You can use one master card for several locks.
User card	User cards are used to open and close the lock. In "Assigned use" mode, up to 250 user cards can be programmed on one lock. In "Shared use" mode, one user card can be used temporarily on one lock. It is possible to program one user card on several locks in "Assigned use" mode, and at the same time on one lock in "Shared use" mode.
Programming card set	For certain programming functions, programming cards are required in conjunction with the master card. The programming card set consists of 3 universal programming cards: • P1: Mode (change of mode) • P2: Sound (activating or deactivating acoustic signals) • P3: Reset (reset to factory settings)
Programming card „P4: Auto Locking“	The universal programming card "P4: Auto Locking" can only be used in the operating mode "assigned use". The function can be activated together with the master card. After opening the lock with a programmed transponder in the operating mode "assigned use", the lock closes automatically after 5 seconds once this function has been activated.
Programming card „P6: Unlimited Shared Use“	The programming card „P6: Unlimited Shared Use“ can be used in the „shared use“ mode. After activation, a RFID transponder can lock several locks at the same time (caution: even up to all locks!), instead of just one lock per transponder in this operating mode.
Update card	In conjunction with the master card and a special adapter, the update card allows firmware updates to be loaded into this lock.
Service key	In addition to the master card, you will receive a card with an individual service key. Please keep the card with the service key carefully and securely. The printed service key allows you to reorder master cards. It is not possible to reorder a master card without a service key! This card has no electronic function!

As user cards, you can either use LEHMANN user cards or cards of a third-party provider complying with ISO 14443A. Please note the following possible restrictions when using user cards of third-party providers:

- The "Shared use" operating mode is only possible with user cards from third-party providers if they have the appropriate write permission for the user card.
- Transponder cards with a so-called "Random-UID" are not supported.

Transponders from third-party providers must be checked for compatibility and for reading distance in advance.

For the highest possible level of safety, transponder cards based on LEGIC advant are recommended.


LEGIC prime transponders are usable to limited extent (only in „assigned use“ mode; not with LMS).

Please note that installation cards, master cards, user cards and programming cards must be ordered separately.

Please store the master card as well as the card with the individual service key in a safe place!

SYSTEM COMPONENTS AND PACKAGE CONTENTS

Please note that these operating instructions apply to different product versions. The package content therefore depends on the respective product variant. The product variants and mounting recommendations shown here are intended for wooden furniture with a thickness of 16-19 mm. In the case of deviating thicknesses and materials, the screws for mounting the lock must be adapted.

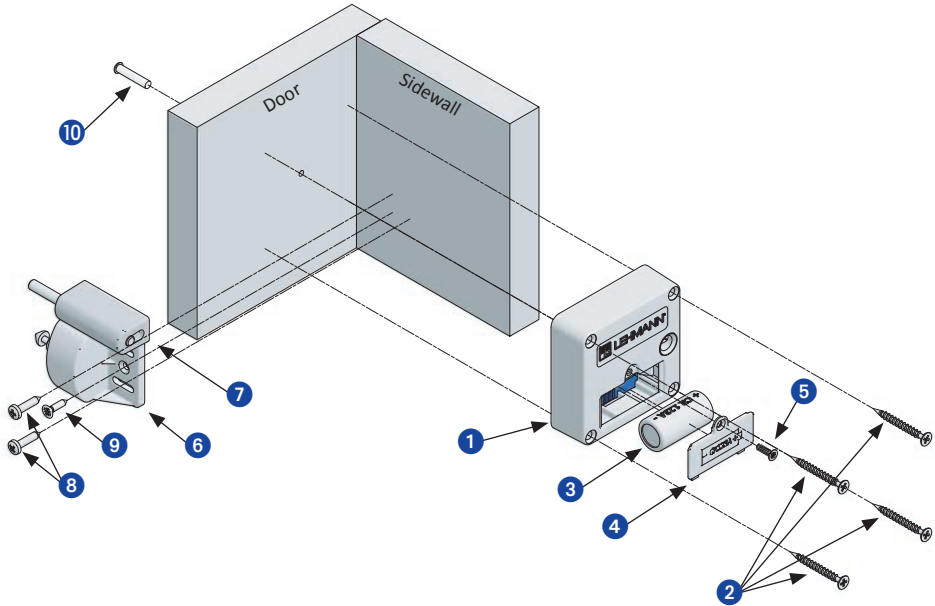


Components:


- | | |
|---|---|
| 1. Lock Captura | 6. Locking pin (here Type A) |
| 2. 4 x countersunk screw 3.5 x 35 cross recess | 7. Ejector pin (only optional) |
| 3. Battery (CR123A) | 8. 2 x half-round 3.5 x 16 cross recess for locking pin |
| 4. Cover for battery compartment | 9. 1 x countersunk screw 3 x 13 cross recess |
| 5. 1 x thermoplastic screw 3x 10 for cover of battery compartment | (only for locking pin Type A) |
| | 10. Lightpoint (only optional) |

DIMENSIONS


Lock Captura

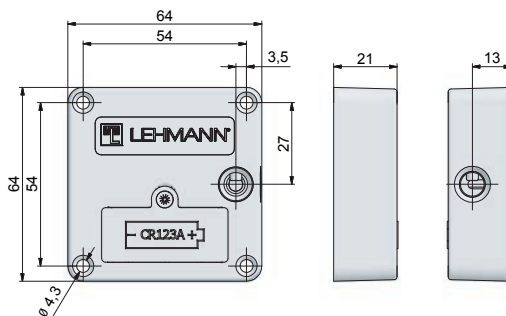


Locking pin unit SD Type A

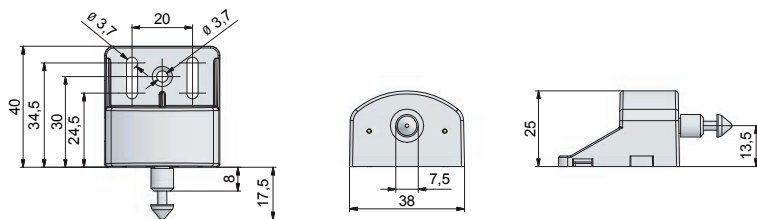


Locking pin unit SD Type A with ejector pin A1

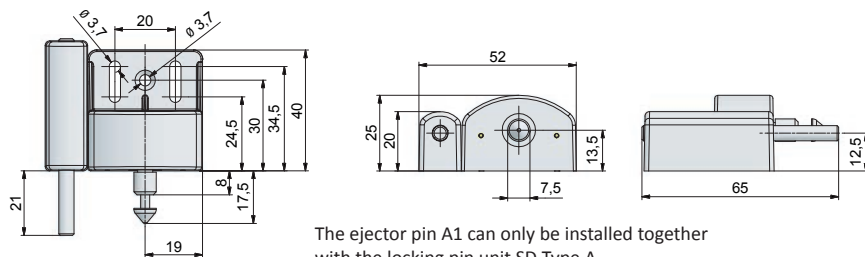


Locking pin unit SD Type B

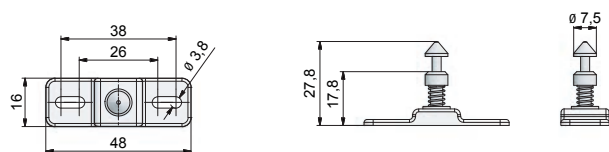


Front cover C4 for metallic surfaces

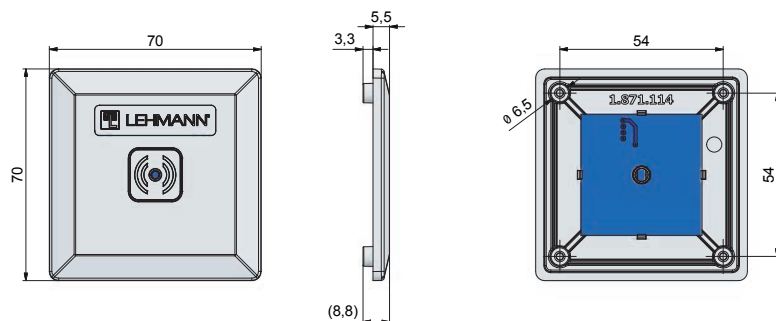

A lightpoint pin can optionally be installed to display optical signals on the furniture front.



Lightpoint O16.1 for wood
with material thickness
of 16-21 mm




Lightpoint O10.1 for HPL
with material thickness
of 10-15 mm

IMPORTANT: Install the lock only when it is unlocked. Hand-tighten all screws. Carry out all programming processes and functional checks with the cabinet door open. In the event of a malfunction, you always have access to all components.


The use of the ejector pin A1 in conjunction with spring-loaded hinges must be checked on a project basis.

MOUNTING ON NON-METAL SURFACES

Mounting the lock with locking pin SD Type A, e.g. for hinge doors:

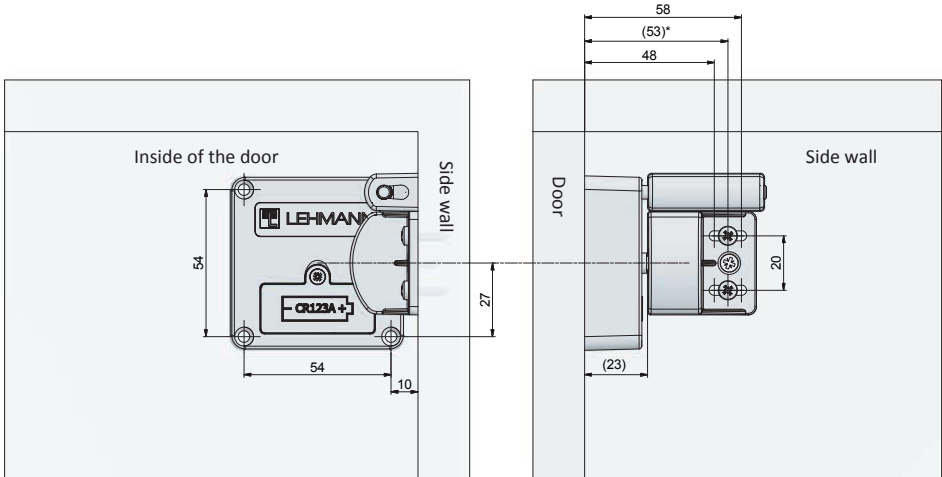


* For an adequate fine adjustment of the locking pin, an average dimension of 53 mm is recommended

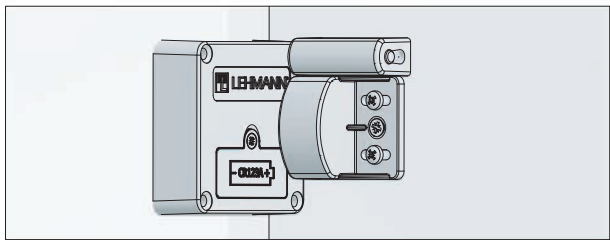


Note that the lightpoint can be installed as an option. Without a lightpoint, only acoustic signaling is available.

Mounting the lightpoint:

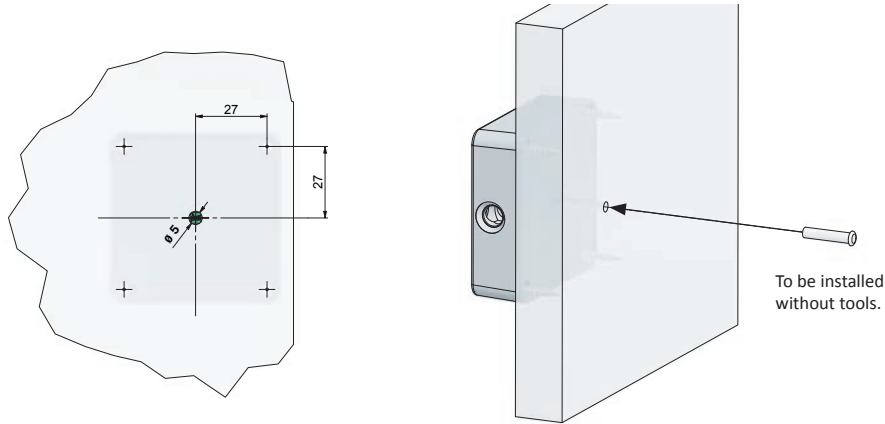

Mounting the lock with locking pin SD Type B, e.g. drawer:

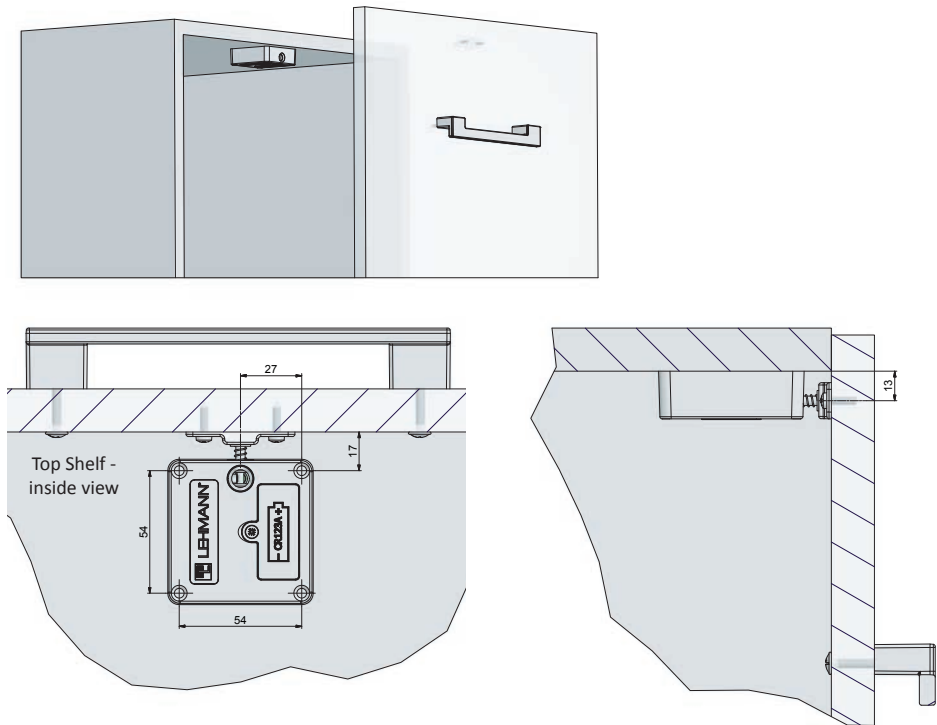

ATTENTION: If no lightpoint is installed, a sticker is recommended on the outside of the door, centered behind the lock, for correct positioning of the RFID transponder.



Using the LEHMANN RFID sticker:

- 1) Remove the backing paper.
- 2) Stick the self-adhesive transfer film with the RFID symbol on the outside of the door, centered behind the lock.
- 3) Carefully pull off the transfer film so that only the RFID symbol sticks to the door.





MOUNTING ON METAL SURFACES

When installing the lock on metall surfaces, the cover C4 for metall surfaces is required. The separate lightpoint is not required because a lightpoint is already integrated in the cover. Only suitable for single-layer steel doors with a thickness of 0.5 - 2.5 mm.

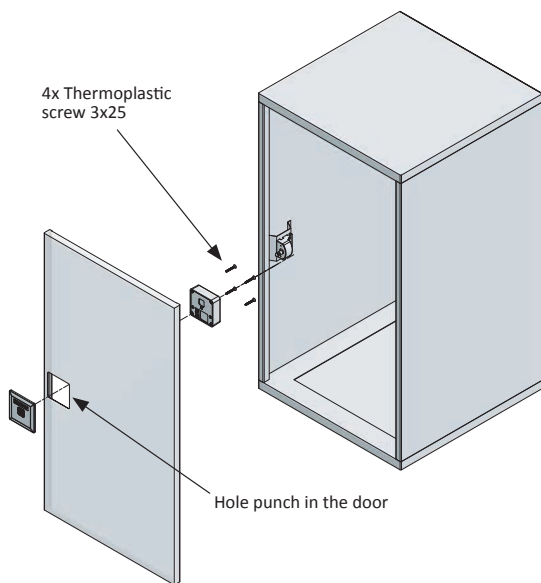

Required hole punch in the door

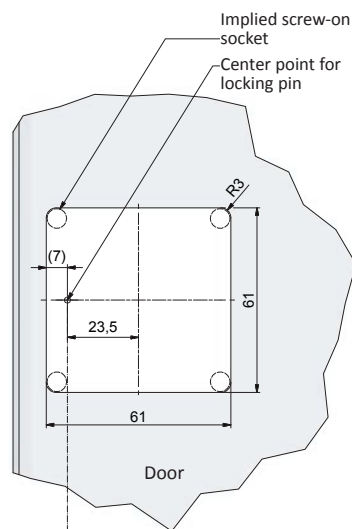


Side wall with locking pin
SD Type A

All dimensions in mm.

GETTING STARTED AND CHANGING BATTERIES

1. Open the cover of the battery compartment by loosening the screw.
2. Insert the battery. Pay attention to the correct polarity of the battery. A long acoustic and an optical signal are provided.
3. Then close the battery compartment cover and hand-tighten the screw.

CAUTION: Use only a CR123A primary-battery. Insert the battery after installing the lock in the furniture.

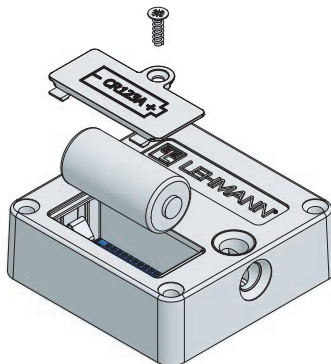

Inserting the battery

Battery is inserted correctly in the battery compartment. Initialisation takes place. During initialisation, no transponders should be placed within the read range of the lock.



TIPS FOR THE FOLLOWING PROGRAMMING STEPS


The last 5 seconds before the timeout of the programming process are announced by the flashing of a yellow lamp and acoustic signals. Optical signals are only available after mounting the optional lightpoint. The visual and acoustic signals are differentiated as follows.

Optical signals

- Quick flashing
- Short flashing
- Long flashing

Acoustic signals

- Short
- Long

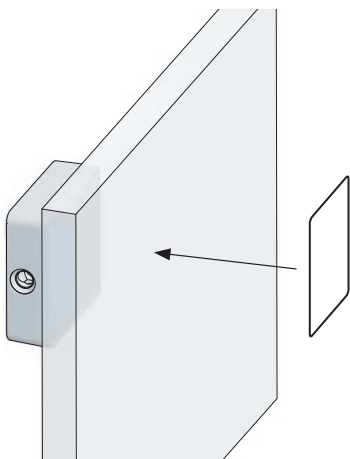


The RFID antenna is located on the back of the lock. Always place the transponder straight and centered on the lock.

USING THE INSTALLATION CARD (optional)

During installation, one or more installation cards can be used. The installation cards are ready for immediate use and do not have to be programmed. With the installation cards, the basic functions (opening and closing) can be carried out on the lock. It is not possible to program user cards with the installation card. The installation card can no longer be used on a lock as soon as the master card has been programmed.


Closing



Hold the installation card in front of the lock.



Opening




Hold the installation card in front of the lock.



PROGRAMMING THE MASTER CARD

Irrespective of the desired operating mode, a master card must always be programmed before further programming and operation. Only one master card can be programmed per lock! The programming of the master card can be carried out when the lock is closed as well as when it is open. If the master card has been programmed while the lock is already closed, the next step must be an emergency opening (see Emergency opening, P. 13).

Programming the master card for the first time






Hold the master card in front of the lock.



The locking system is in “assigned use” mode after the master card has been programmed. If you would like to use the lock in “shared use” mode, the next thing to do is to change the operating mode. To do this, please follow the instructions on page 15 and then continue with the section “Closing and Opening” on page 12.



Programming the User Cards (only for “assigned use” mode)

In “assigned use” mode, a maximum of 250 different user cards can be programmed per lock. It is not possible to program user cards in “shared use” mode. In “shared use” mode, the lock can be opened and closed without first programming the user cards (see Closing and Opening, see below).

Programming user cards	
 Hold the master card in front of the lock.	
 Hold the user card in front of the lock. The card is accepted and programmed. This process can be repeated to program multiple user cards. Card is not accepted.	 
 Hold the master card in front of the lock.	


After programming, the user cards can open and close the lock.

CLOSING AND OPENING

Closing	
 Hold the user card in front of the lock.	
Opening	
 Hold the user card in front of the lock.	

UNAUTHORISED TRANSPONDERS CARDS

Rejection of an unauthorised user card




Unauthorised user card is held in front of the lock. The card is rejected.



FACILITY MANAGER FUNCTION

In the event that an authorised person only briefly wants to check whether for example a cabinet is actually occupied, the lock can be opened with the master card. With this function, the lock opens for 30 seconds and then closes automatically. After this automatic closure, authorised user cards can continue to be used in “shared use” mode as well as in “assigned use” mode. The last 5 seconds before closing are indicated by optical and acoustic signals.

Facility Manager Function (lock closes automatically after 30 seconds)




Hold the master card in front of the lock.




EMERGENCY OPENING

In the event that one or all authorised user cards are currently not available, an emergency opening can be effected with the master card. Please note that the lock remains open after emergency opening. In the “shared use” mode, the previously used user card is blocked after emergency opening, and can no longer be used. In “assigned use” mode, user cards can continue to be used normally.

Emergency opening



Hold the master card in front of the lock.






Hold the master card again in front of the lock.





DELETING INDIVIDUAL TRANSPONDER CARDS (only for “assigned use” mode)




If further user cards were programmed on the lock, these can continue to be used on this lock after an individual user card has been deleted. For the deleting process, the lock must be open. To do this, first carry out an emergency opening with the master card if necessary (see Emergency opening, P. 13).


Deleting individual user cards	
 Hold the master card in front of the lock.	
 Hold the user card to be deleted in front of the lock.	
 Hold the master card in front of the lock.	

Should the user card be lost, then please proceed as follows.

DELETING ALL TRANSPONDER CARDS (only for “assigned use” mode)





The deleting process can only be carried out when the lock is open. Should there be no authorised user card to hand, first perform an emergency opening using the master card.

Deleting all user cards	
 IMPORTANT: Hold the master card in front of the lock until all the following optical and acoustic signals have been received.	
 IMPORTANT: Hold the master card in front of the lock until all the following optical and acoustic signals have been received.	

 Hold the master card in front of the lock.	
--	---

CHANGING THE OPERATING MODE

The lock has two modes: “assigned use” and “shared use”. When the lock is open, you have the option of changing the mode. To do this, the master card and the programming card “P1: Mode” are required. The programming card set must be bought separately from LEHMANN Vertriebsgesellschaft mbH & Co. KG. The cards are for universal use.





Changing the operating mode	
 Hold the master card in front of the lock.	
 Hold the programming card “P1: Mode” in front of the lock. “Shared use” mode is selected.  Hold the programming card “P1: Mode” in front of the lock again. “Assigned use” mode is selected.	Shared use  Assigned use 
 Hold the master card in front of the lock.	

DEACTIVATING AND ACTIVATING ACOUSTIC SIGNALS

Acoustic signalling is activated when the system is delivered. You have the option of deactivating the acoustic signals by using the master card and the programming card "P2: Sound". For this, the lock must be open. It is recommended that the acoustic signals should only be deactivated if the lightpoint is mounted. Otherwise, neither visual nor acoustic signals are passed on to the users, making programming and possibly also operation difficult.

Please note that the acoustic signals for the battery warning and for changing the operating mode cannot be deactivated.

The programming card set must be bought separately from LEHMANN Vertriebsgesellschaft mbH & Co. KG. The cards are for universal use.


Deactivating and activating acoustic signals	
 Hold the master card in front of the lock.	
 Hold the programming card "P2: Sound" in front of the lock. The acoustic signals are deactivated.	Acoustic signals are deactivated 
 Hold the programming card "P2: Sound" in front of the lock again. The acoustic signals are activated again.	Acoustic signals are activated 
 Hold the master card in front of the lock.	

RESETTING TO FACTORY SETTINGS (RESET)


If a reset to factory settings is required, all master and user cards are deleted. With an installation card the basic functions (close and open) can be carried out. The bolt is retracted, and the lock must be reprogrammed with a master card.

The reset function can be used with the help of the master card and programming card "P3: Reset". For this, the lock must be open. The programming card set must be bought separately from LEHMANN Vertriebsgesellschaft mbH & Co. KG. The cards are for universal use.


Resetting to factory settings




Hold the master card in front of the lock.




Hold the programming card "P3: Reset" in front of the lock.



Hold the programming card "P3: Reset" in front of the lock again.



Hold the master card in front of the lock. During initialisation, no transponders should be placed within the read range of the lock.







ACTIVATION AND DEACTIVATION OF AUTOMATIC LOCKING

With the programming card "P4: Auto Locking", the function "automatic locking" can be activated and deactivated in the operating mode "assigned use". Once the function is activated, the lock closes automatically 5 seconds after opening the lock with an authorized transponder. It is recommended to activate "automatic locking" after programming the transponders.

The function can be carried out by using the master card and the programming card "P4: Auto Locking". To do this, the lock must be in the mode "assigned use" and in an open position. If the operating mode changes, this function is automatically deactivated. The programming card must be purchased separately from LEHMANN Vertriebsgesellschaft mbH & Co. KG. The card can be used universally.

NOTE: If the function „automatic locking“ is activated, hold the master card in front of the lock immediately after opening in order to start the programming. Otherwise, the lock will lock automatically after 5 seconds. The lock must be in an open position for programming incl. programming user cards.

Activate or deactivate the feature automatic locking

 Hold the master card in front of the lock.	
 Hold the programming card "P4: Auto Locking" in front of the lock again. Automatic locking is activated.	Automatic locking is activated. 
 Hold the programming card "P4: Auto Locking" in front of the lock again. Automatic locking is deactivated.	Automatic locking is deactivated. 
 Hold the master card in front of the lock.	


ACTIVATION AND DEACTIVATION OF UNLIMITED SHARED USE



With the master card and the „P6: Unlimited Shared Use“ programming card, the function can be activated and deactivated in the „shared use“ mode. After activation, an RFID transponder can lock several locks at the same time (caution: even up to all locks!), instead of just one lock per transponder in this operating mode. To activate and deactivate the function, the lock must be in an open position. The configuration process is the same process as the activation and deactivation of the auto locking function (see page 17).

CONFIGURE CAPTURA WITH LEGIC SYSTEM AUTHORIZATION MEDIA (SAM)

Special permissions and configurations are transferred to the Captura by using the SAM 63 card that is part of the LEGIC Master-Token System-Control (MTSC). Following this, only LEGIC advant transponders or user cards with the associated digital stamp can be used on the Captura. Master and programming cards are still usable. The lock must be open in order to program the SAM 63 card. Detailed information about the LEGIC MTSC is available at www.legic.com.

Configuration with LEGIC SAM 63 card




 Hold the master card in front of the lock.	
---	---

 Hold the LEGIC SAM 63 card in front of the lock.	
 Hold the master card in front of the lock.	

If the lock is in delivery state (no master card programmed), you can hold the card LEGIC SAM 63 directly in front of the lock for configuration without a master card.

REMOVE LEGIC MTSC CONFIGURATION ON CAPTURA

With the SAM 64 (System Authorization Media) card, which is part of the LEGIC MTSC (Master-Token System-Control), the previously created authorizations and configurations by using the SAM 63 card are deleted again in the Captura. Following that, all types of transponders mentioned on page 2 under technical specifications can be used again. The lock must be open when using the SAM 64 card.

Remove configuration with LEGIC SAM 64 card	
 Hold the master card in front of the lock.	
 Hold the LEGIC SAM 64 card in front of the lock.	
 Hold the master card in front of the lock.	

BATTERY WARNING

The locking system is equipped with a battery management system which uses visual and acoustic signals to indicate the need for battery replacement in the event of reduced battery power. The battery warning takes place in two phases:

Battery warning Phase 1

Before an action can be carried out (closing / opening / programming), a battery warning is given. The batteries should be replaced.

The battery warning is also given every 60 minutes.



Battery warning Phase 2

The lock can only be opened. Before the lock opens, a battery warning is given. The batteries must be replaced without delay.

The battery warning is also given every 60 minutes.



The settings are saved even without a power source (e.g. in case of battery replacement, or in case the battery should be completely empty). Battery replacement should be carried out within 2 minutes.

REORDERING MASTER CARDS

With this locking system, you have the option of ordering replacements for your master cards at your own expense. For this you obtained a service key together with the master cards. Please keep the service key carefully and securely. The service key makes it possible to reorder the master card specified there.

To reorder these cards, please contact LEHMANN Vertriebsgesellschaft mbH & Co. KG at the following email address: sales@lehmann-locks.com

In your email, please give us your contact data and the service key. In your email, please also state the number of replacement cards you require.

FIRMWARE UPDATE

You have the option of updating the firmware of the lock. A special adapter is required for this. Firmware updates for this lock are only made available on the website www.lehmann-locks.com if required (e.g. for technical reasons). You will receive further information on the implementation and installation together with the firmware update.



DISPOSAL

Dispose the locking system in accordance with local regulations and guidelines. Remove the battery and dispose them separately in accordance with the national regulations. When disposing of partially discharged batteries, make sure that there are no short circuits between the battery poles (risk of explosion and fire).

LEHMANN Vertriebsgesellschaft mbH & Co. KG
Uphauser Weg 82 • D-32429 Minden
Fon +49 571/50 599-0 • Fax +49 571/50 599-822
info@lehmann-locks.com • www.lehmann-locks.com
DIN EN ISO 9001:2015 zertifiziert